BRUHATH BANGALORE MAHANAGARA PALIKE, DASARAHALLI ZONE
Office of the Executive Engineer, Dasarahalli Division

Modified SCHEDULE-B

Name OF Work: Improvements to drain at MEI layout at Bagalagunte in ward no. 14

Sl. No	Description of work	Unit	Qty	Sanctioned Approved Rates	
				In Figures (Rs.)	In Words (Rs.)
1	2	3	4	5	6
1	Earthwork excavation by manual means in ordinary soil involving an average horizontal throw upto 2 metres and an average lift upto 0.5m, excavated surface levelled and sides neatly dressed, the disposed earth to be levelled neatly after breaking of clods complete as per specifications. complete as per the direction of Engineer-in-charge of the work. (Qty. Executed Upto 125%)	Cum	319.50	89.18	Rupees Eighty Nine and Eighteen Paise Only
	Qty. Executed Above 125%		83.79	89.18	Rupees Eighty Nine and Eighteen Paise Only
2	Removing B.S slab of Drain and stacking and Removing & Refixing stone slabs of drains and pointing in C.M (1:3) complete as per the direction of Engineer-in-charge of the work.	Sqm	110.16	150.08	Rupees One Hundred Fifty and Eight Paise Only
3	Providing and laying in position plain cement concrete of mix 1:4:8 with OPC cement @ 180 kgs, with 40 mm and down size graded granite metal coarse aggregates @ 0.85 cum and fine aggregates @ 0.57 cum machine mixed, concrete laid in layers not exceeding 15cms, thick, well compacted, in foundation and plinth,including cost of all materials, labour HOM of machinery curing complete as per specifications. complete as per the direction of Engineer-in-charge of the work.	Cum	76.68	5293.15	Rupees Five Thousand Two Hundred Ninety Three and Fifteen Paise Only
4 EIRL ITEM	Design mix M20 with OPC cement @ 320kgs, with 20mm and down size graded granite metal coarse aggregates @0.69cum and fine aggregates @ 0.46cum, with superplastisiser @3lts confirming to IS9103-1999 Reaffirmed-2008- i) Upto 5 m height.	Cum	110.56	7146.35	Rupees Seven Thousand One Hundred Forty Six and Thirty Five Paise Only
5 EIRL ITEM	Supplying, fitting and placing TMT bar Fe 500 reinforcement in sub-structure complete as per drawing and Technical Specifications complete as per specifications	Tonne	8.46	68210.67	Rupees Sixty Eight Thousand Two Hundred Ten and Sixty Seven Paise Only

Executive Engin
Dasarahalli Divis

Signature of Contractor

Scanned by CamScanner

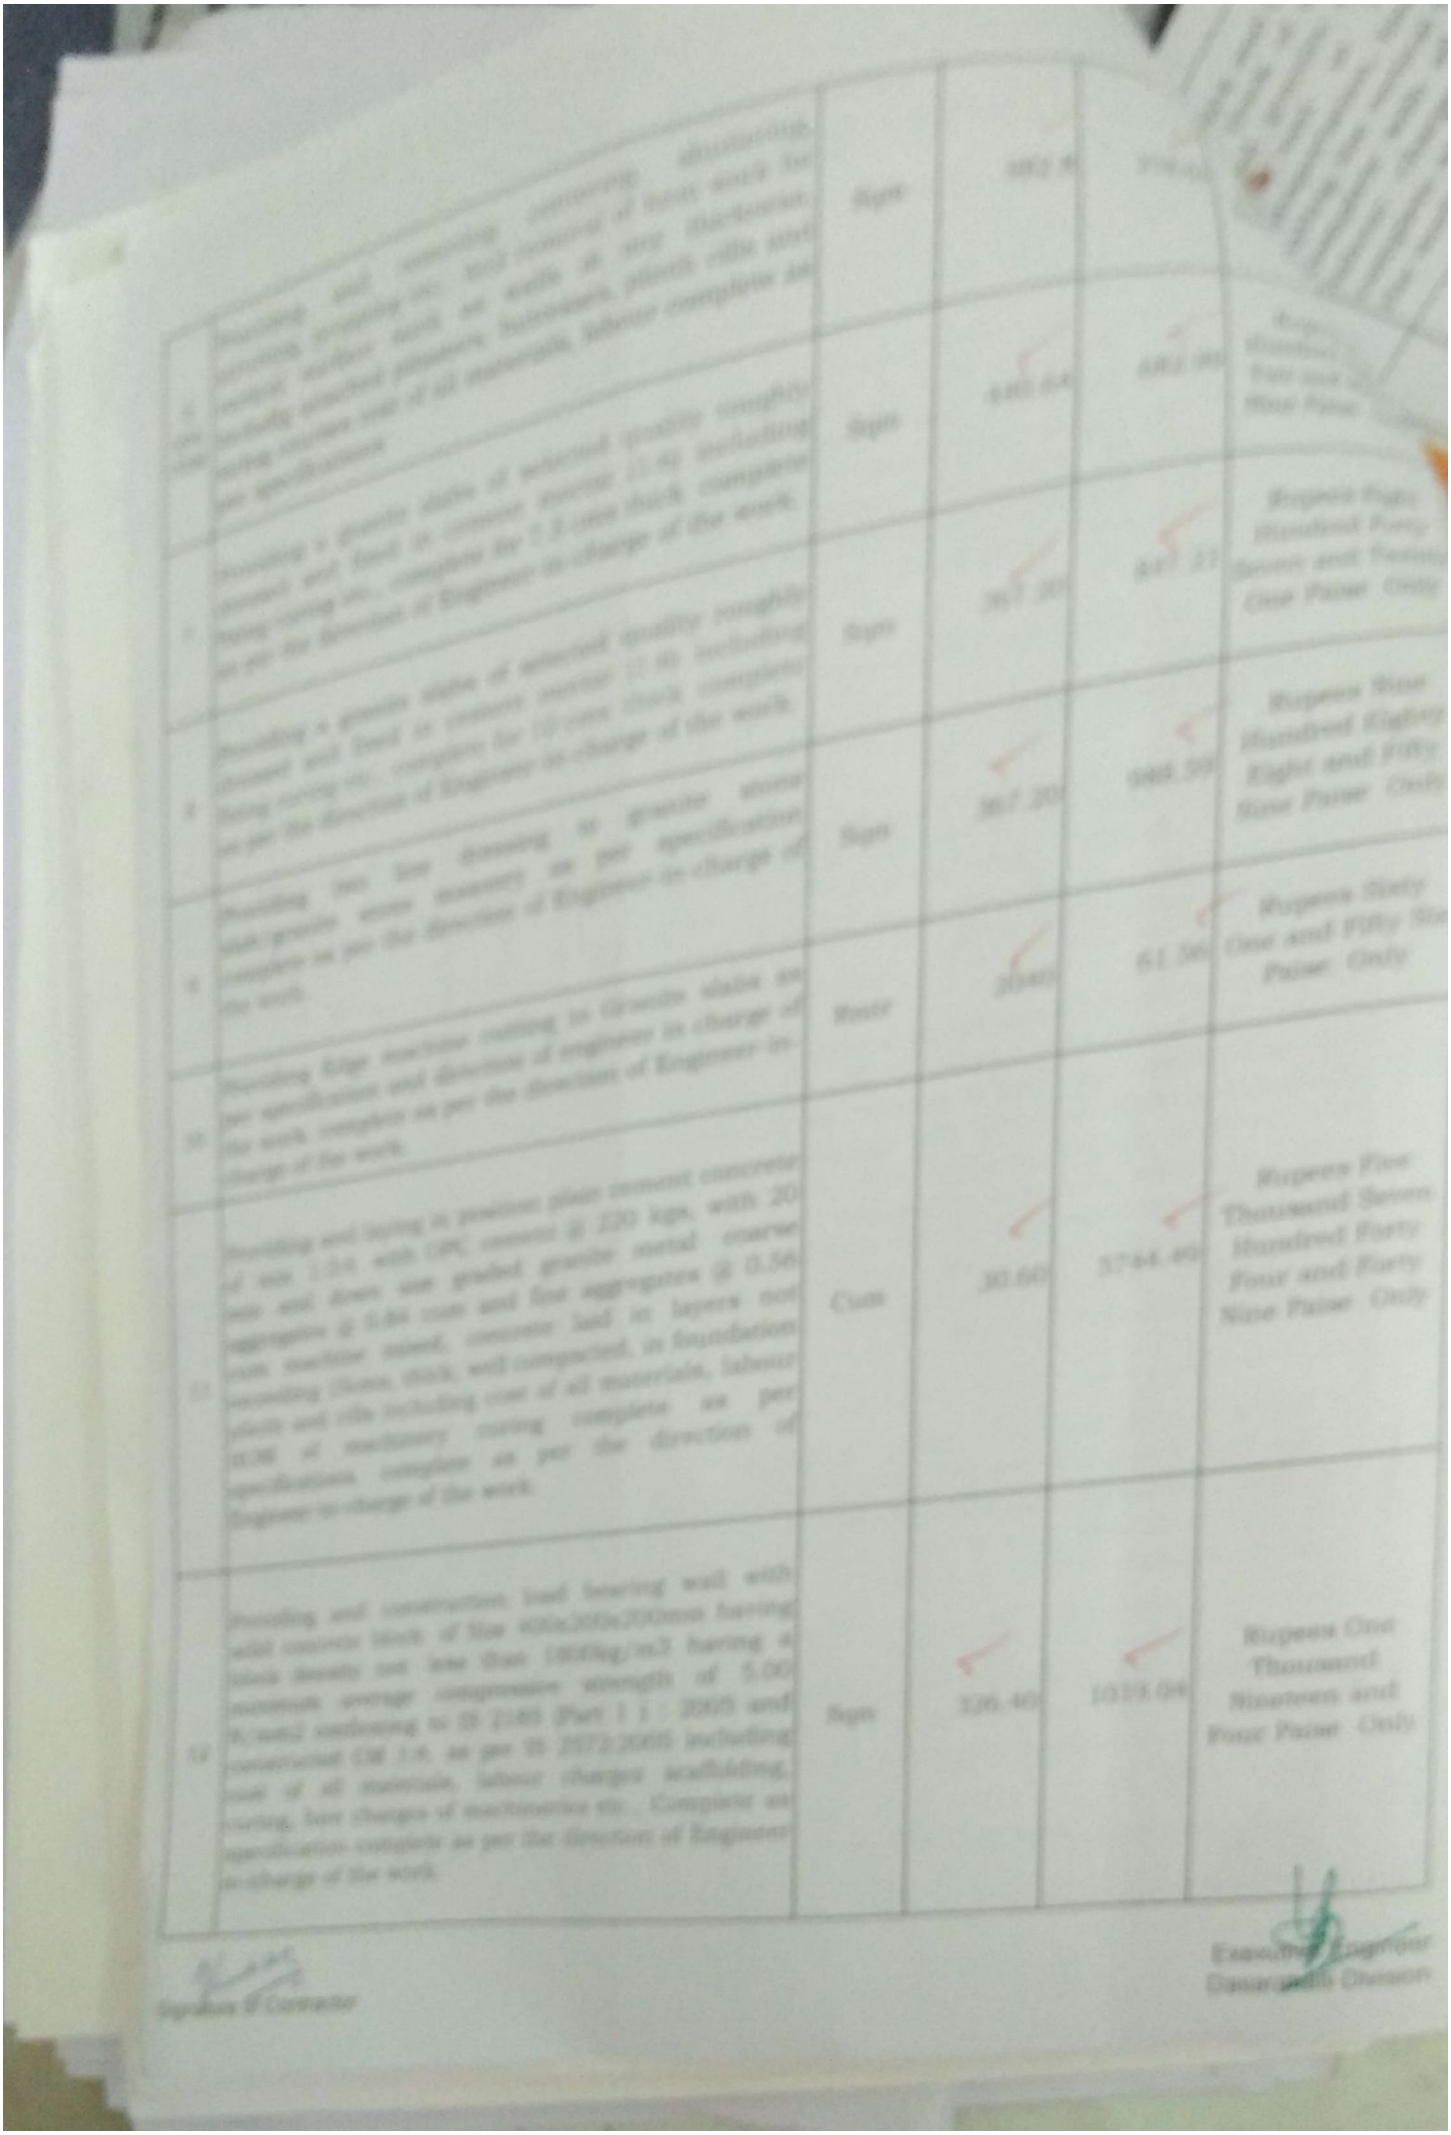

	...ing and fixing precast reinforced concrete slabs ...ick of mix 1:2:4 using 20mm and aggregate ...ainable metal using reinforcement 10mm ...ter at 150mm C/C both ways cast ...consolidation, hire charges of machinery in machine ...ing the vertical face to get plain even surface etc., complete with all lead and lift conveyance charges, labour charges inclusive of cost of all materials complete as per the direction of Engineer in charge of the work.	Sqm	399.76	1742.15	Rupees One Thousand Seven Hundred Forty Two and Fifteen Paise Only
14	Providing and fixing Pre cast solid concrete kerb stones made out of C.C 1:3:6 and finished with C.M 1:3 plastering and finishing cutting etc., complete, of size 450 x 300 x 400 mm complete as per the direction of Engineer in charge of the work.	Nos	1513.66	395.87	Rupees Three Hundred Ninety Five and Eighty Seven Paise Only
15	Providing and applying ready mix priming coat over concrete / masonry / asbestos cement sheet / plastered surfaces including preparing the surface after throughly cleaning of oil, grease, dirt and other foreign matter, and sand papering including cost of materials, labour, complete as per specifications complete as per the direction of Engineer in charge of the work.	Sqm	306.45	28.28	Rupees Twenty Eight and Twenty Eight Paise Only
16	Providing and applying spary painting in two coats (excluding priming coat) over concrete / masonry / asbestos cement sheet / plastered surfaces with flat wall paint of approved brand to give even shade after cleaning the surface of all dirt, dust and other foreign matter, and sand papering including cost of materiasl, labour, complete as per specifications. complete as per the direction of Engineer in charge of the work.	Sqm	306.45	71.78	Rupees Seventy One and Seventy Eight Paise Only
17	Disposal of debris to the final place of disposal with all lead and lift and as direction by the engineer in charge of the work, lead 5KM Qty. Executed Upto 125%	Cum	319.50	87.88	Rupees Eighty Seven and Eighty Eight Paise Only
	Qty. Executed Above 125%		83.79	86.18	Rupees Eighty Six and Eighteen Paise Only

Signature of the Contractor

Executive Engineer,
Dasarahalli Division,

Signature of Contractor

Exexutive Engineer
Dasarahalli Division

Scanned by CamScanner